


AI-900-032 Knockdown Detection Sensor

Overview

Our Knockdown Detection Sensor connects to any AI device and monitors it for sudden and unexpected changes in orientation. It's self calibrating, so no configuration is necessary, and if the cabinet has more than a 10 degree change that persists for more than 30 seconds, it will alert. Alerts are sent to appropriate personnel via text, email, and Glance.

Features

- ✓ Compatible with all AI products
- ✓ Self calibrating on power-up
- ✓ Detects knockdown in any direction
- ✓ Small form factor
- ✓ Low power consumption
- ✓ Email, text, and Glance alerts

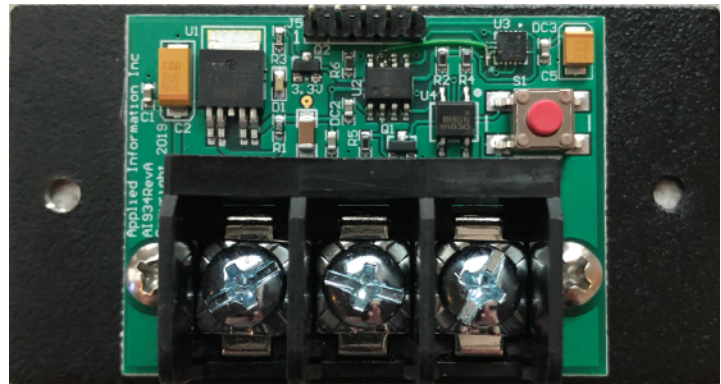

900-032

Technical Details

Operating Temperature	-37°C to 74°C
Humidity	5-95% non-condensing
Dimensions	3.25" (L) x 1.63" (W) x 1.63" (H)
Input Voltage	9-24v DC
Power Consumption	5 mA
Knockdown sensor	3 axis accelerometer
Calibration	Automatic and has manual override switch

Call us today to get started at [678.830.2170](tel:678.830.2170) or email us at sales@appinfoinc.com!